

APB Series “micro” feeders

APB feeders


Switched-mode power supplies for mast-mounted amplifiers. Compact size with terrestrial and satellite inputs.

APPLICATION


Collective and individual TV and satellite reception installations.

FEATURES

- The smallest on the market.
- Fits perfectly into an 80x80 mm junction box.
- Optimal energy consumption thanks to the low-power switching power supply.
- Easy to connect and install thanks to an innovative wall-mounting system.
- Built-in spirit level for perfect positioning.
- No need to drill into the wall thanks to the adhesive mounting.
- Automatic Set-Top Box detection on the APB112 model: allows the STB to supply power when switched on; once switched off, the APB 112 takes control and supplies power to the mast amplifier.
- 1 RF input connector + DC output to the input / 1 or 2 RF outputs.
- LED indicator light.

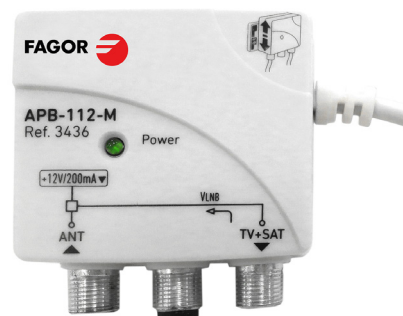

APB-112-M

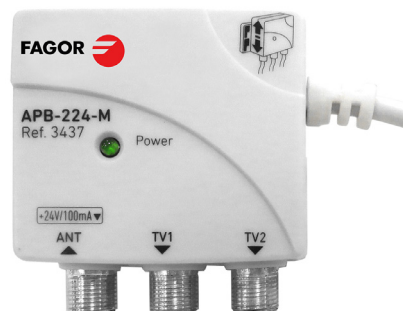

APB-224-M

MODEL		APB-112-M	APB-224-M
Reference		3436	3437
EAN code		8435136434368	8435136434375
Control type		switched	
Output		1	2
Mains voltage (50 Hz)	VAC	100 - 240	
Output voltage	VDC	+12 (±5%)	+24 (±5%)
Max. output current	mA	200	100
Frequency range	MHz	47-2400	47-862
Insertion loss	dB	≤ 1.5	≤ 4
Current rating	mA	300	-
Efficiency	%	>70	
Dimensions	mm	50 x 50 x 25	