



ARTU series socket outlets

ARTU series


FEATURES

- Socket base for daisy-chain mounting
- Quick cable fastening thanks to the swivel clamp.
- Easy connection via the live insertion system.
- Minimal signal loss.
- Current flow via the C2 connector, SAT output.
- Compatible with the main faceplates on the market.

ICT facilities

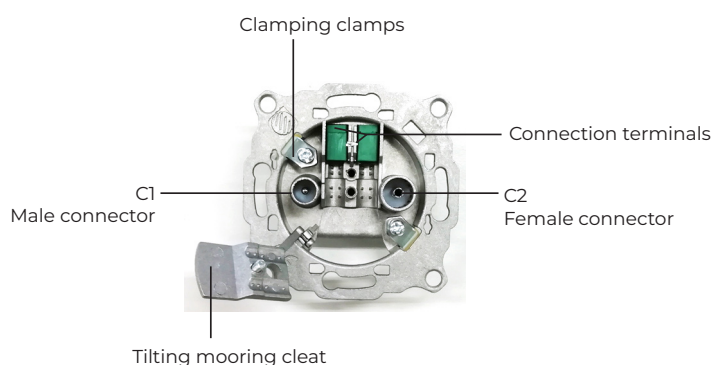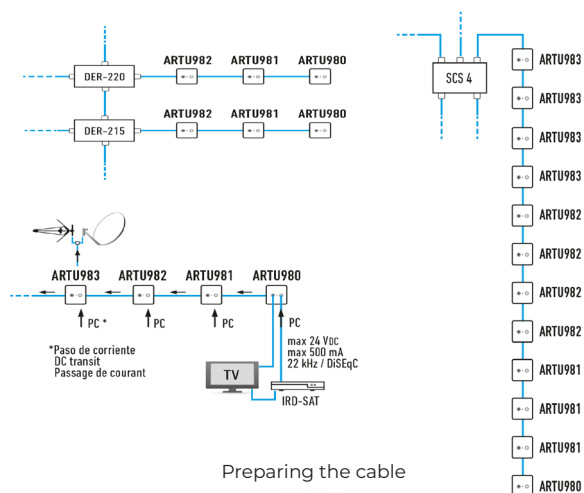

Preparing the cable



MODEL		ARTU980		ARTU981		ARTU982		ARTU983	
Reference.		2578		2579		2580		2575	
Installation		Final		Intermediate		Intermediate		Intermediate	
Type		Inductive							
Conne- ctor		C1	IEC male						
		C2	IEC female						
Frequency range	MHz	C1	5 - 862 / 950 - 2400						
		C2							
Connection attenuation	dB	TV	< 4,5 at C1 < 6 at C2	< 9		< 13		< 20	
		SAT		< 10		< 14		< 24	
Passband attenuation	dB	TV	-	< 2		< 1.2		< 0.5	
		SAT	-	< 3		< 2		< 1.2	
C1-C2 decoupling	dB	TV	> 16	> 25		> 25		> 25	
		SAT							
University Entrance Exam	dB	TV	-						
		SAT							
Return losses	dB	TV	> 10						
		SAT	> 6						
Power supply C2	VDC		24						
	mA		500						
	Tone		22 kHz / DiSEqC						
Mounting brackets		Yes							
Units/Pack	pc	10 / 100							
Packaged weight	kg	0.872 / 9.5							
Packaging dimensions	mm	170x70x130 / 780x160x180							